



PICKLE INJECTOR „INJECT-O-MAT“

PSM-12-4.5-I



- Rugged, heavy-duty nickel-chromium-steel construction throughout
- 12 continuously spraying, spring-loaded single needles \varnothing 4.5 mm in two rows, for high injection rates with minimal brine pressure, replaceable without tools
- Two patented pressure-compensation stripper blocks for continuous brine circulation to ensure accurate injection rates and minimize risk of plugged needles
- Infinitely variable relief valve regulates brine pressure of the rust proof impeller pump IP-45, capacity 45 liters/min., with separate drive motor 0.75 kW, can be disassembled without tools
- Glycerine manometer for pressure gauge display
- Suction filter on all intakes with quick-connection couplings and return-flow filter unit with replaceable filter insert
- Gearmotor for stroke and belt drive, 0.63 kW
- Needle carrier speed: 32/64 strokes per minute
- No tools needed to remove conveyor unit, with rugged, food-safe plastic-link belt, 250 mm wide
- Belt advance: 15 – 45 mm, mechanically adjustable in 6 steps
- Passing width: 270 mm
- Passing height: 200 mm
- Standard voltage: 400V/50Hz/3Ph

**PICKLE INJECTOR „INJECT-O-MAT“
PSM-12-4.5-I**

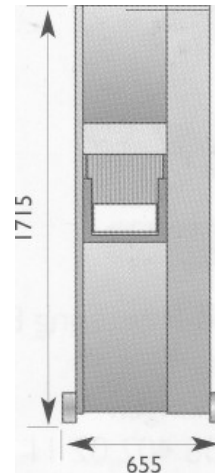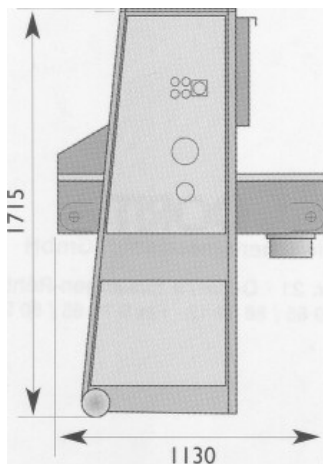

Technical Data		
Number of single needles		12
Number of needle heads		1
Needle diameter	mm	4.5
Strokes per minute		32 / 64
Belt advance, adjustable in 6 strokes	mm	15 - 45
Max. product height	mm	200
Channel width	mm	270
Max. capacity per hour	kg	400-600
Max. injection rate in one pass (Impeller pump IP-45)		35 %
Needle head drive	kW	0.63
Brine pump	kW	0.75
Dimensions (packed)	cm	135 x 80 x 205
Approx. net weight	kg	190
Approx. gross weight, with seaworthy crating	kg	300